



Dynamic

115v/230v

FEATURES

- Lightweight and compact size
- 2.3-liter reservoir
- Incomparable performance
- Includes standard 15-ft. (5m) hose



Hyflow

115v/230v/380v

FEATURES

- One of the fastest power packs available
- 7.75-liter reservoir and 4-port manifold
- Assured parallel joint closure faster for fewer passes from a safe distance
- Includes oil cooler and standard 15-ft. (5m) hose



Hyflow

Air

FEATURES

- Super high-flow 770-cu. in. heavy duty Power Pack
- 7.75-liter reservoir and 4-port manifold
- Designed for use with TORC hydraulic torque tools and all 10,000 PSI equipment
- Built-in air filter and lubricator
- Includes standard 15-ft. (5m) hose



Hyflow Twin

Twin Air / Twin Electric


FEATURES

- High-powered twin-motor, 3-stage pump
- 2x the speed and oil flow of any other available system
- Ideal for use with very large hydraulic-powered bolting systems or large multi-tool systems
- Includes standard 15-ft. (5m) hose

NOTE:
All tools and pumps are subject to a 13-months free repair/replacement guaranty in the event of failure. Data subject to change without notice.

NOTE:
All tools and pumps are subject to a 13-months free repair/replacement guaranty in the event of failure. Data subject to change without notice.

TORC PUMP MODEL COMPARISONS

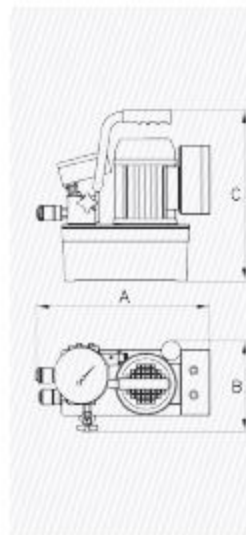


Dynamic

115v/230v

Dimensions:

Imperial	Metric
A (L): 14"	355 mm
B (W): 16"	406 mm
C (H): 1.3"	33 mm

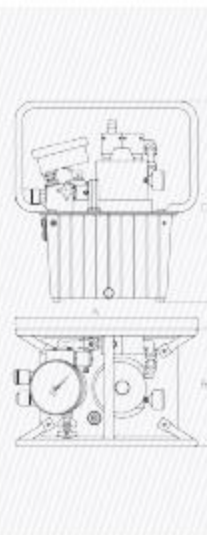


Hyflow

Air

Dimensions:

Imperial	Metric
A (L): 20"	508 mm
B (W): 11"	279 mm
C (H): 16"	406 mm

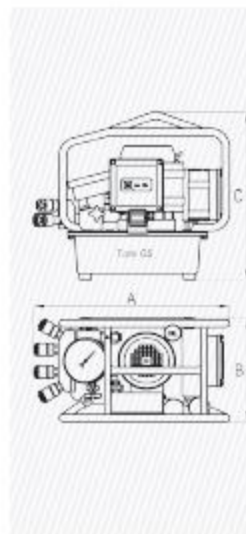

Hyflow

115v/230v/380v

Dimensions:

115v/230v

(With Oil Cooler)


Imperial	Metric
A (L): 15.5"	394 mm
B (W): 9.9"	251 mm
C (H): 14.8"	376 mm

(Without Oil Cooler)

Imperial	Metric
A (L): 19"	483 mm
B (W): 15"	381 mm
C (H): 23"	584 mm

380v

Imperial	Metric
A (L): 17.4"	442 mm
B (W): 10.7"	272 mm
C (H): 16.6"	422 mm

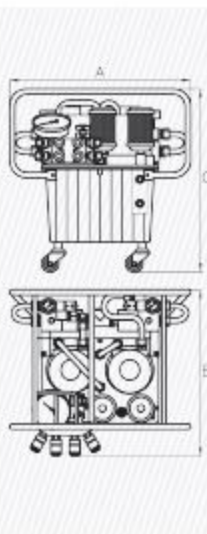

Hyflow

Twin

Dimensions:

Twin Air

Imperial	Metric
A (L): 18.8"	478 mm
B (W): 9.8"	249 mm
C (H): 16.1"	409 mm

Twin Electric

Imperial	Metric
A (L): 20"	508 mm
B (W): 16"	406 mm
C (H): 17"	432 mm

NOTE:
All tools and pumps are subject to a 13-months free repair/replacement guaranty in the event of failure. Data subject to change without notice.

TORC PUMP MODEL COMPARISONS (CONT'D.)

Pump Model	Max. Pressure		Max. Flow				Weight (Without Oil)			
	psi	bar	@ 60 Hz		@ 50 Hz		lbs.	kg		
			cu. in.	cu. m	cu. in.	cu. m	cu. in.	cu. m	lbs.	kg
 DYNAMIC 115/230v	10,000	700	—	—	250	0.004	200	0.003	33	14.9
 HYFLOW Air	10,000	700	770	0.013	—	—	—	—	46	21
 HYFLOW 115v/230v (with Oil Cooler)	10,000	700	—	—	620	0.010	510	0.008	57	26
115v/230v (without Oil Cooler)	10,000	700	—	—	620	0.010	510	0.008	44	20
380v	10,000	700	—	—	620	0.010	510	0.008	49	22
 HYFLOW Twin Twin Air	10,000	700	—	—	1,200	0.020	1,000	0.016	130	60
Twin Electric	10,000	700	1,500	0.025	—	—	—	—	98	44

NOTE:
All tools and pumps are subject to a 13-months free repair/replacement guaranty in the event of failure. Data subject to change without notice.